

Button Control Switch

按钮控制开关



56PB



56PBS



56PBS1



56PBS2









56/2PB



56/2PBS1

外形尺寸 Dimension

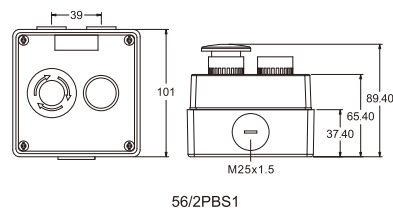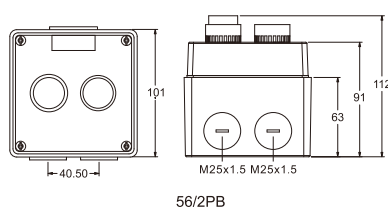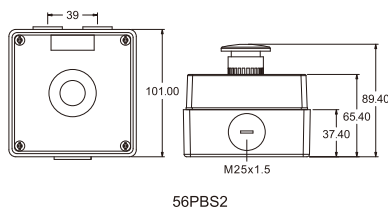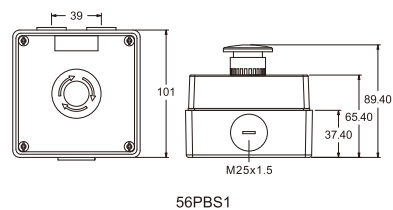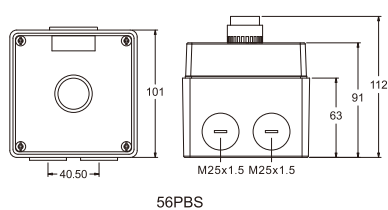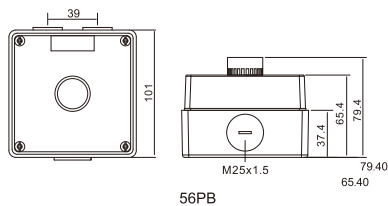

Button Control Switch

按钮控制开关

包括五种不同的停止、开始控制站组合。

在潮湿、多尘或污秽条件下，此控制站适用于泵、锯、压缩机、车床、处理装置以及工艺线上电动机起动器的控制。

This range consists of five different combinations of stop start control stations. The stations are ideal in wet, dusty or dirty conditions for controlling motorstarters on pumps, saws, compressors, lathes, processors and processing lines.

56PB-起动控制站

56PBS-停止控制站

56PS1-应急停止站，此站有一个蘑菇头，带转动复位和红色按钮。

56PBS2-停止站，此站有一个蘑菇头，带转动复位和红色按钮
(仅标明停止)

56/2PB-停止/起动组合站有瞬动按钮。红色停止按钮有一个延伸头，绿色起动按钮有一个埋头。

56/2PBSI -停止/起动组合站停止按钮与56PBS1相同。

56PB- Start control station.


56PBS- Stop control station.

56PS1- Emergency stop station. This station has a mushroom head with twist reset and red push-button.

56PBS2- Stop station. This station has a mushroom head with twist reset and red push-button (labelled stop only).

56/2PB- Combination stop/start control station with momentary operation push-buttons. The red stop button has an extended head and the green start button a flush head.

56/2PBSI- Combination stop/start control station with same stop button as the 56PBS1.

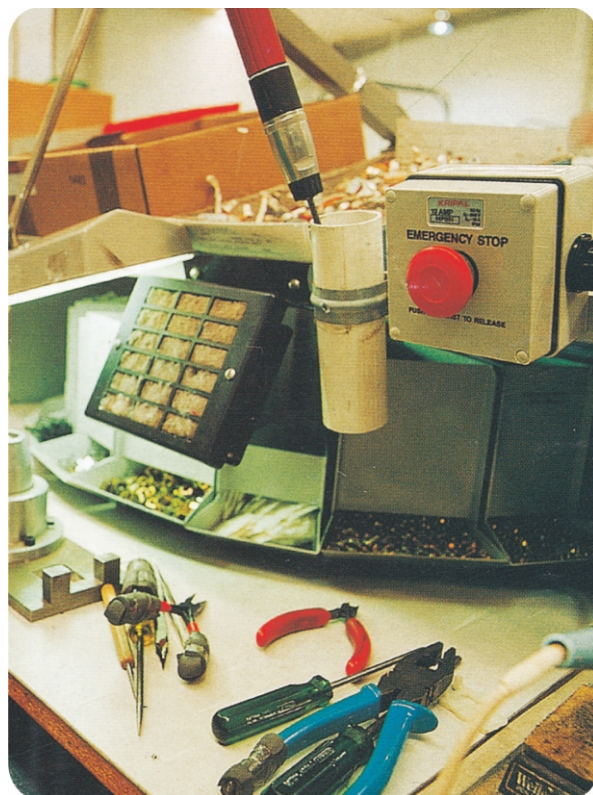

可选项 Options

■ 较小外壳在型号后加LE，例如56PB加LE就是56PBLE

■ 56PBS1、56/2PB以及56/2PBS1可配耐久性橙色，在型号后加RO，例如，56PBS1加RO后就是56PBS1RO。

■ Smaller Enclosure-add LE to Model NO e.g.56PB to 56PBLE

■ 56PBS1,56/2PB and 56/2PBS1available in Resistant Orange-add RO to Model Number e.g.56PBS1 becomes 56PBS1RO.

型号 Type	Ithe (A)	UI /Ue (V)	IE(A) 额定电流 Utilisation Category		按钮颜色 Button Colour	导线端子尺寸mm ² Conductor Term. Size in mm ²		IP防护等级 IP Protection class	外形尺寸(H)x(W)x(D) O/A Dims (H)x(W)x(D)
			AC15 240V	DC13 24V		最小 Min.	最大 Max.		
56PB	10	250	6	8	绿色 Green	1	4	66	107x101x79
56PBS	10	250	6	8	红色 Red	1	4	66	107x101x112
56PBS1	10	250	6	8	红色 Red	1	4	66	107x101x89
56PBS2	10	250	6	8	红色 Red	1	4	66	107x101x89
56/2PB	10	250	6	8	红色/绿色 Red/Green	1	4	66	107x101x112
56/2PBS1	10	250	6	8	红色/绿色 Red/Green	1	4	66	107x101x89

使用类别至IEC60947.5.

Ithe — 约定密闭热电流

UI — 绝缘电压

Utilisation categories to IEC60947.5.

Ithe - Conventional Enclosed Thermal Current

UI - Insulated Voltage

Ue — 操作电压

Ie — 操作电流

Ue-Operational Voltage

Ie -Operational Current