

Contactors

接触器

3极接触器

3-pole contactors



型号(A) Model	6	9	12	18	22	32	40	50	65
功率(kW,400V) Power	2.2	4	5.5	7.5	11	15	18.5	22	30

4极接触器

4-pole contactors



Contactors

接触器




75	85	100	125	150	180	220	330	400	500	630	800
37	45	55	60	75	90	132	200	250	295	400	450




Contactors

接触器

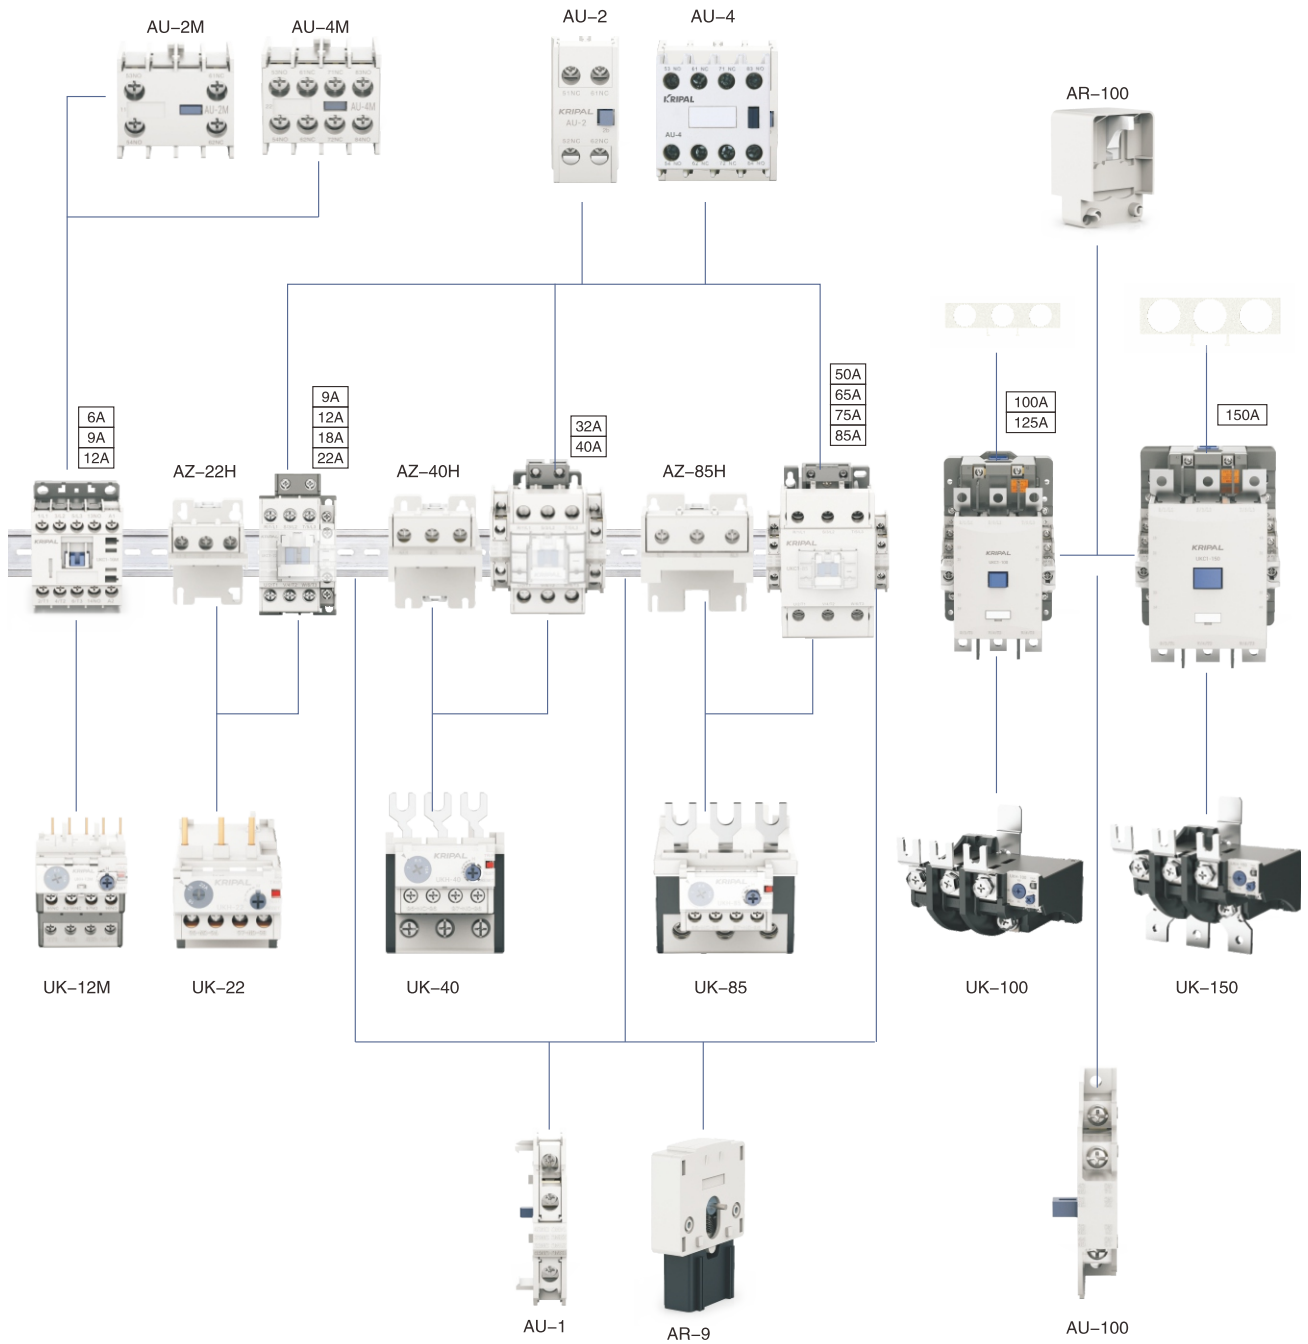

Contactors

接触器

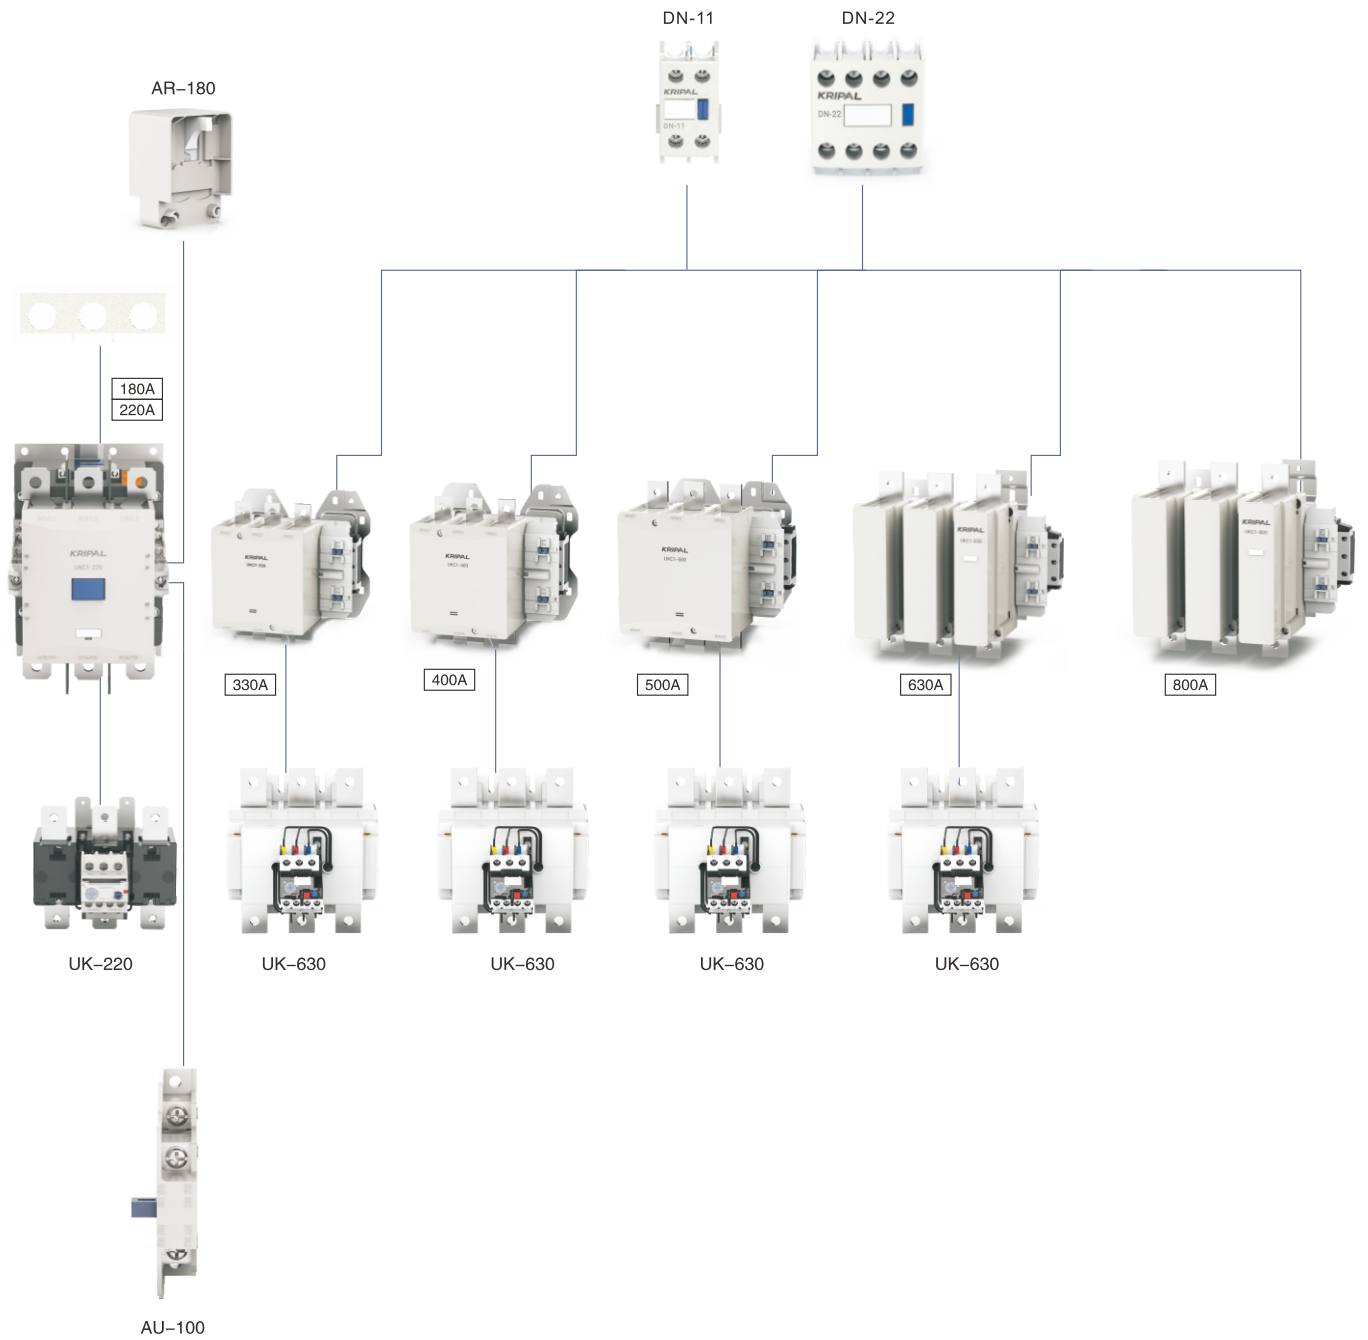


3P Contactors

三极接触器




UKC1-9~85

电磁接触器
Electromagnetic contactor

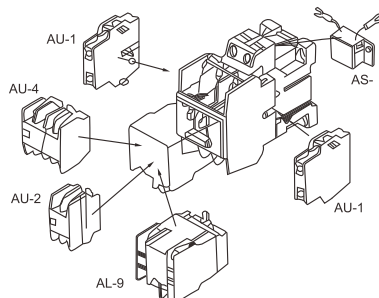

热过载继电器
Thermal overload relays



使用方便 结构合理 Convenient for use and reasonable structure

- 接触器以及热过载继电器上设置防止触电用防护罩
Auxiliary electrified contact block is used, convenient for installation
- 使用通电的辅助触头块，安装方便
Contact and heat overload relay are set with electric shock shield.



3种外观尺寸(9A-85A)

- 接触器和热过载继电器按外型尺寸分为三种
Contactor and thermal overload relay is classified into three types according to external dimensions.



热继电器可以直接与接触器插接

- 接触器和热继电器连接时无须其他附件可直接连接
Contactor and thermal relay can be connected directly, without any other fittings




多样化的安装方式

- 可用螺丝安装或直接安装在35mm DIN
Install by using screws or directly install at the standard guide track of 35mm.

3P Contactors

三级接触器

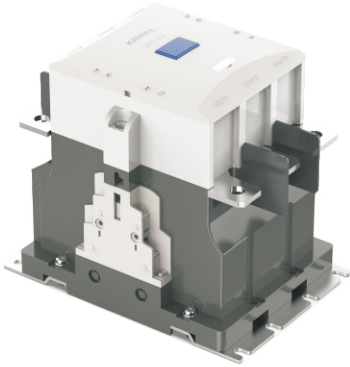

UKC1-100~220

使用方便 Convenient for use

- 更换辅助触头不必拆下接触器
It is not necessary to dismantle auxiliary contact block.
- 辅助触头块100A-220A均可通用
Contactor while replacing auxiliary contact.



易于更换线圈 Easy to replace coil

- 使用抽出式线圈结构使更换线圈变的非常容易,不必拆下接触器
It is easy to replace coil for using drawout type coil structure and unnecessary to dismantle contactor.



多种附件

Variety of fittings

- 辅助触头 Reversible type contactor.
- 机械互锁单元 Mechanical interlock unit.
- 延时断开单元 Delay breaking unit



接线简单

Mechanical lock unit

- 采用夹钳式接线端子
Using clamp type connecting terminal



通过EMC 测试 Passing EMC test

- 抗浪涌冲击及电磁辐射
Resistant to surge impact and electromagnetic radiation

宽操作电压范围及实现直流通用

Wide applicability of operating voltage and general use for DC

- 100-240V,直流(DC220V)通用,50Hz和60Hz通用
100-240V, DC220V, 50Hz/60Hz common use