

KRIPAL

工业连接器

Industrial Connector



工业插头 / 插座 连接器产品系列

Industrial Plugs, Wall Mounted Socket, Connector

Plug In Device

接插装置

Outline

概述

UKS系列接插装置，是我公司根据国家相关标准和用户实际需要开发的电气产品，具有防护等级高、安全可靠、外形美观、接线方便、使用寿命长等特点。产品主要有插头、插座、连接器、附加插头、附加插座、机械联锁、低压系列、大电流系列、专用冷藏集装箱等，适用范围广泛。此系列产品改进了抓握进出便于插拔操作的设计，外部电缆紧固装置能够保护内部垫圈，带电导体的接触载体都是采用耐高温的材料，整体防护等级达到IP44或IP67，更好提高了安全性。产品广泛应用于石油、化工、冶金、电厂、煤矿、机械、轻纺、港口、码头等行业。

As per the relative standards and real needs of users, UKS series plug socket are developed with the features of high ingress protection, safety & reliability, amazing structure, easy wiring, long life time and others. The main products are plug, connector, panel mounted plug socket, wall mounted plug socket, interlock switch socket, low-voltage series, high-current series and refrigerated container series. For the better safety performance, the improvements are performed as follow; a. the improved design of easy operation; b. inner gasket protected by external cable grip; c. high heat-resistant materials of electric contact carriers; d. Ingress protection: IP44/IP67. On the basis of these, our products are widely used in oil, chemical industry, metallurgy, power plants, coal mines, machinery, textile, ports, docks and other industries.

The Model Definition

产品名称示意图

UK □ - □ □ □ □ □ - □

地线方向位置: Position of grounding:
6:6h; 7:7h; 12:12h; 2:2h; 9:9h; 4:4h; 10:10h;

安装方式: 1. 向内倾斜20°; 2. 中心固定;
Installation: 1: inward tilt 20°; 2: central fixation;

电压 Voltage: 3. 20V-25V; 4. 40V-50V; 5. 安装尺寸 Dimension: 3. 20V-25V; 4. 40V-50V;

IP等级 IP Rating: 4: IP44; 6: IP67;

级数 Pole: 2:2P 3:3P 4:4P 5:5P

规格 Specification: 16A、32A、63A、125A、250A、420A

名称Name:

A 插头	B 附加插座	C 连接器	D 装置插头	E 附加装置插头	F 插座
G 相位转换插头	H 相序检测插头	I 机械连锁A	J 机械连锁B		
K 相位转换附加装置插头	L 相位转换装置插头	M 插座带开关			
N 明装插头	O 机械连锁和DIN标准安装导轨				

A Plug B Panel mounted socket C Connector D Wall mounted plug E Panel mounted plug
F Wall mounted socket G Phase inverter plug H Phase rotation test plug
I Interlocked switch socket A J Interlock switch socket B K Phase-inverter panel mounted plug
L Phase-inverter wall mounted plug M Switch socket N Surface mounted plug
O Mechanical interlock & Din Installation

代号: S (标准型); S2 (分体式); S3 (和谐系列)
Code: S (Standard) S2: (Split) S3: (Hexie Series)

企业代号: 浙江科瑞普电气有限公司
Enterprise symbol: zhejiang KRIPAL Electric Co., Ltd

The Main Parameter (Please check in the detailed classifications.)

主要技术指标 (详见分类)

使用 Usage

用户需正确接入电源线，使用时，请不要带电插拔。
Please power off first before operating plug in/pull out it.

维护 Maintenance

接插装置虽具有耐腐蚀、抗冲击和特性，但用户使用中还应保持产品表面和内部整洁，随时除去油污、水垢、灰尘和其它附着于表面的脏物。



Plug sockets are corrosion & impact resistance, and please keep the products clean and wipe the oil, scale, dust and other dirt away.

订货须知 Order

用户订货只须写明规格型号及订货数量即可。如有特殊要求，我们也可根据用户要求专业制作。
Please specify the details and quantity when you place orders. Customization is available if special requirements are needed.

Connector

连接器

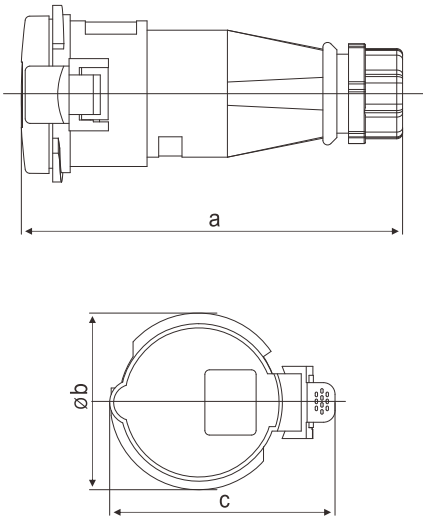

Description

选型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 3h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
16	3	UKS-C134-4	UKS-C134-6	UKS-C134-9	UKS-C134-7	UKS-C134-10	UKS-C134-2
16	4	UKS-C144-4	UKS-C144-9	UKS-C144-6	UKS-C144-7	UKS-C144-10	UKS-C144-2
16	5	UKS-C154-4	UKS-C154-9	UKS-C154-6	UKS-C154-7	UKS-C154-10	UKS-C154-2
32	3	UKS-C234-4	UKS-C234-6	UKS-C234-9	UKS-C234-7	UKS-C234-10	UKS-C234-2
32	4	UKS-C244-4	UKS-C244-9	UKS-C244-6	UKS-C244-7	UKS-C244-10	UKS-C244-2
32	5	UKS-C254-4	UKS-C254-9	UKS-C254-6	UKS-C254-7	UKS-C254-10	UKS-C254-2

▲ IP 44 CEE / IEC 连接器，带螺钉接线端子，一体外壳结构
▲ IP 44 CEE / IEC Connector: screwed terminals, shell of integrated structure

Parameter

参数



电流(A) Current (A)		16			32		
极数 Pole (P)		3	4	5	3	4	5
尺寸 Dimension (mm)	a	162	165	167	209	209	209
	b	60	68	76	82	82	82
	c	83	90	98	100	100	108
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		1.5 - 4	1.5 - 4	1.5 - 4	2.5 - 10	2.5 - 10	2.5 - 10

Other requirements, please contact us freely 其它电压和频率的产品请来函询问
German industrial standard: DIN VDE 0623, European / International standard: EN/IEC 60309-2
www.kripal.com ◆ 符合德国工业标准 DIN VDE 0623, 欧洲/国际标准EN/IEC 60309-2

KRIPAL

Connector

连接器

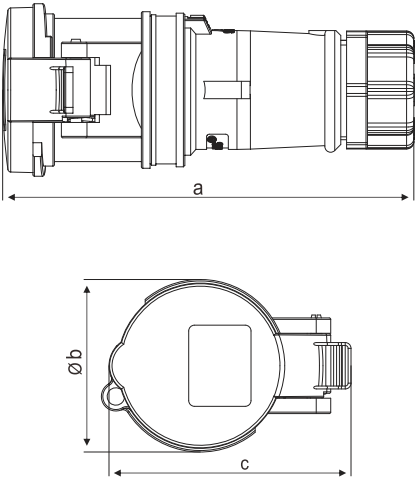

Description

选型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 9h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
16	3	UKS2-C134-4	UKS2-C134-6	UKS2-C134-9	UKS2-C134-7	UKS2-C134-10	UKS2-C134-2
16	4	UKS2-C144-4	UKS2-C144-9	UKS2-C144-6	UKS2-C144-7	UKS2-C144-10	UKS2-C144-2
16	5	UKS2-C154-4	UKS2-C154-9	UKS2-C154-6	UKS2-C154-7	UKS2-C154-10	UKS2-C154-2
32	3	UKS2-C234-4	UKS2-C234-6	UKS2-C234-9	UKS2-C234-7	UKS2-C234-10	UKS2-C234-2
32	4	UKS2-C244-4	UKS2-C244-9	UKS2-C244-6	UKS2-C244-7	UKS2-C244-10	UKS2-C244-2
32	5	UKS2-C254-4	UKS2-C254-9	UKS2-C254-6	UKS2-C254-7	UKS2-C254-10	UKS2-C254-2

▲ IP 44 CEE / IEC 连接器，带螺钉接线端子，带锁省时外壳结构

▲ IP 44 CEE / IEC Connector: screwed terminals, enclosure with thread lock and safety slide


Parameter

参数

电流(A) Current (A)		16			32			
极数 Pole (P)		3	4	5	3	4	5	
尺寸 Dimension (mm)	a	141.9	146.9	149.5	170.2	170.2	183.5	
	b	59.5	67.5	75.5	81.5	81.5	88.5	
	c	83.5	90	96.5	102.5	102.5	109.5	
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		1.5 - 4	1.5 - 4	1.5 - 4	2.5 - 10	2.5 - 10	2.5 - 10	

Connector

连接器

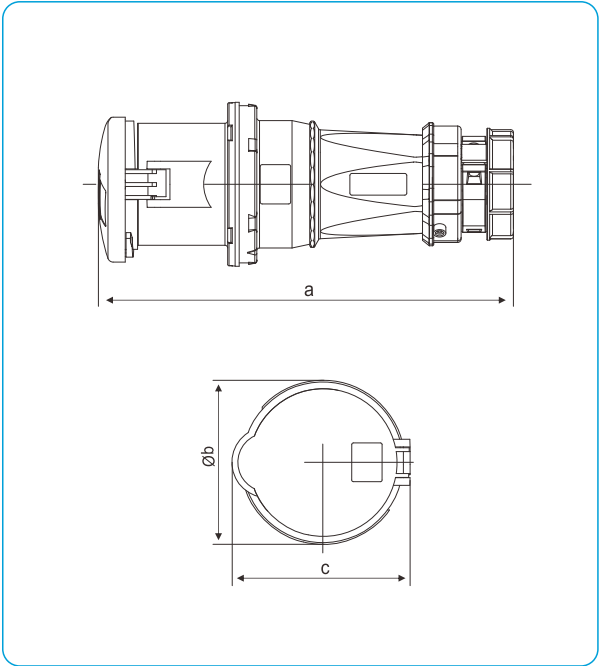

Description
选型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 3h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
63 63 63	3 4 5	UKS-C334-4 UKS-C344-4 UKS-C354-4	UKS-C334-6 UKS-C344-9 UKS-C354-9	UKS-C334-9 UKS-C344-6 UKS-C354-6	UKS-C334-7 UKS-C344-7 UKS-C354-7		




▲ IP 44 CEE / IEC 连接器，软接触工艺，带外部电缆紧固装置及耐高温接触载体
▲ IP 44 CEE / IEC Connector: Soft-touch process, external cable grip, highly heat resistant contact carrier

Parameter
参数

电流(A) Current (A)		63		
极数 Pole (P)		3	4	5
尺寸 Dimension (mm)	a	268	268	268
	b	95	95	95
	c	109	109	109
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		6 - 25	6 - 25	6 - 25

Connector

连接器

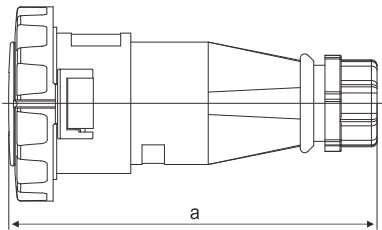

Description

选型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 9h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
16	3	UKS-C136-4	UKS-C136-6	UKS-C136-9	UKS-C136-7	UKS-C136-10	UKS-C136-2
16	4	UKS-C146-4	UKS-C146-9	UKS-C146-6	UKS-C146-7	UKS-C146-10	UKS-C146-2
16	5	UKS-C156-4	UKS-C156-9	UKS-C156-6	UKS-C156-7	UKS-C156-10	UKS-C156-2
32	3	UKS-C236-4	UKS-C236-6	UKS-C236-9	UKS-C236-7	UKS-C236-10	UKS-C236-2
32	4	UKS-C246-4	UKS-C246-9	UKS-C246-6	UKS-C246-7	UKS-C246-10	UKS-C246-2
32	5	UKS-C256-4	UKS-C256-9	UKS-C256-6	UKS-C256-7	UKS-C256-10	UKS-C256-2


- ▲ IP 67 CEE / IEC 连接器，带螺钉接线端子，一体外壳结构
▲ IP 67 CEE / IEC Connector: screwed terminals, shell of integrated structure

Parameter

参数

电流(A) Current (A)		16			32		
极数 Pole (P)		3	4	5	3	4	5
尺寸 Dimension (mm)	a	146	166	172	212	212	213
	b	72	79	89	96	96	102
	c	80	88	95	98	98	105
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		1.5 - 4	1.5 - 4	1.5 - 4	2.5 - 10	2.5 - 10	2.5 - 10

Connector
连接器

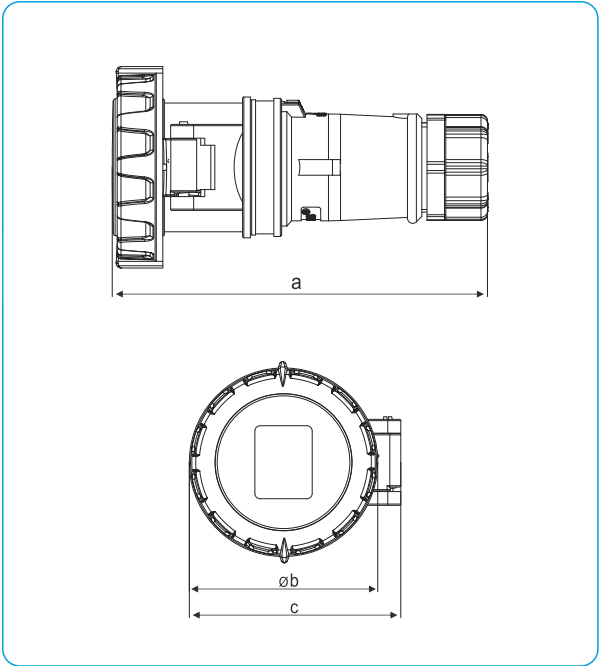

Description
选型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 3h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
16	3	UKS2-C136-4	UKS2-C136-6	UKS2-C136-9	UKS2-C136-7	UKS2-C136-10	UKS2-C136-2
16	4	UKS2-C146-4	UKS2-C146-9	UKS2-C146-6	UKS2-C146-7	UKS2-C146-10	UKS2-C146-2
16	5	UKS2-C156-4	UKS2-C156-9	UKS2-C156-6	UKS2-C156-7	UKS2-C156-10	UKS2-C156-2
32	3	UKS2-C236-4	UKS2-C236-6	UKS2-C236-9	UKS2-C236-7	UKS2-C236-10	UKS2-C236-2
32	4	UKS2-C246-4	UKS2-C246-9	UKS2-C246-6	UKS2-C246-7	UKS2-C246-10	UKS2-C246-2
32	5	UKS2-C256-4	UKS2-C256-9	UKS2-C256-6	UKS2-C256-7	UKS2-C256-10	UKS2-C256-2



▲ IP 67 CEE / IEC 连接器，带螺钉接线端子，带锁省时外壳结构
▲ IP 67 CEE / IEC Connector: screwed terminals, enclosure with thread lock and safety slide

Parameter
参数

电流(A) Current (A)		16			32		
极数 Pole (P)		3	4	5	3	4	5
尺寸 Dimension (mm)	a	144	149	154	170.4	170.4	183.6
	b	72.3	78	87	93	93	100
	c	81.2	87	94.5	100.5	100.5	107
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		1.5 - 4	1.5 - 4	1.5 - 4	2.5 - 10	2.5 - 10	2.5 - 10

Connector

连接器

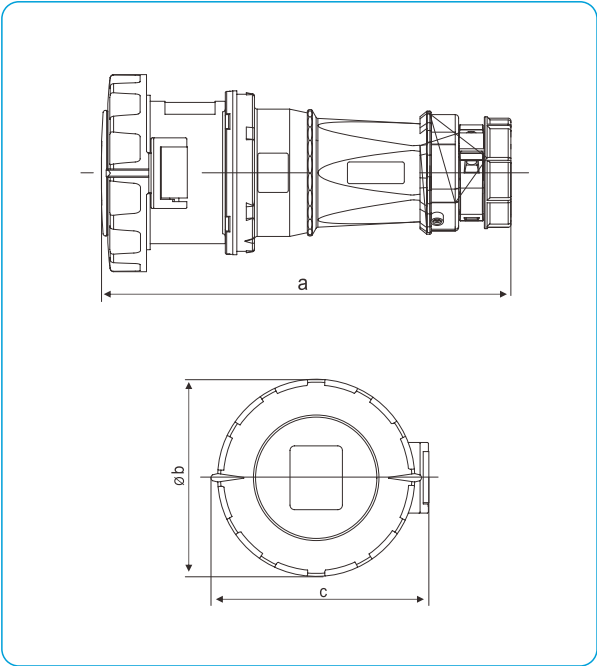

Description



电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz	230 V 50 a. 60 Hz	400 V 50 a. 60 Hz	500 V 50 a. 60 Hz	>50-500V 100-300Hz	>50-500V a.300-500Hz
		3P 4h 4P 4h 5P 4h	3P 6h 4P 9h 5P 9h	3P 9h 4P 6h 5P 6h	3P 7h 4P 7h 5P 7h	3P 10h 4P 10h 5P 10h	3P 2h 4P 2h
63	3	UKS-C336-4	UKS-C336-6	UKS-C336-9	UKS-C336-7		
63	4	UKS-C346-4	UKS-C346-9	UKS-C346-6	UKS-C346-7		
63	5	UKS-C356-4	UKS-C356-9	UKS-C356-6	UKS-C356-7		

▲ IP 67 CEE / IEC 连接器，软接触工艺，带外部电缆紧固装置及耐高温接触载体
▲ IP 67 CEE / IEC Connector: soft-touch process, external cable grip, highly heat resistant contact carrier

Parameter

电流(A) Current (A)		63		
极数 Pole (P)		3	4	5
尺寸 Dimension (mm)	a	270	270	270
	b	113	113	113
	c	123	123	123
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		6 - 25	6 - 25	6 - 25

Connector
连接器

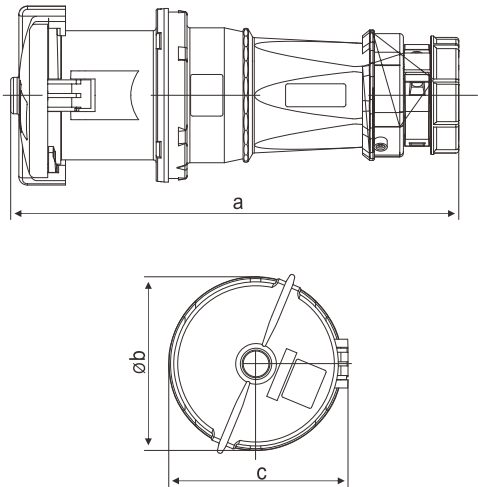


Description
选型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 3h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
125	3	UKS-C436-4	UKS-C436-6	UKS-C436-9	UKS-C436-7		
125	4	UKS-C446-4	UKS-C446-9	UKS-C446-6	UKS-C446-7		
125	5	UKS-C456-4	UKS-C456-9	UKS-C456-6	UKS-C456-7		

▲ IP 67 CEE / IEC 连接器，软接触工艺，带外部电缆紧固装置及耐高温接触载体
▲ IP 67 CEE / IEC Connector: soft-touch process, external cable grip, highly heat resistant contact carrier

Parameter
参数

电流(A) Current (A)		125		
极数 Pole (P)		3	4	5
尺寸 Dimension (mm)	a	310	310	310
	b	125	125	125
	c	135	135	135
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		25 - 70	25 - 70	25 - 70

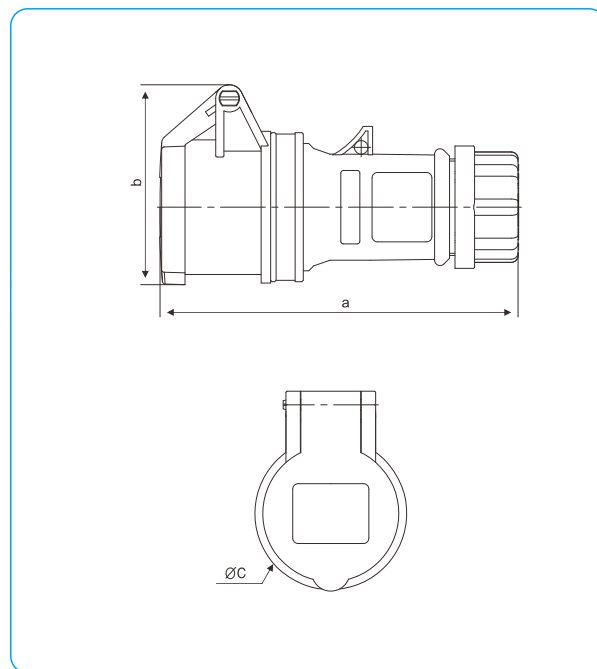

选型

电流(A) Current(A)	极数 Pole	20-25 V 50 a. 60 Hz	40-50V 50 a. 60 Hz				
		—	12h				
16	2	UKS-C1243	UKS-C1244-12				
16	3	UKS-C1343	UKS-C1344-12				
32	2	UKS-C2243	UKS-C2244-12				
32	3	UKS-C2343	UKS-C2344-12				

△ IP 44 CEE / IEC Low voltage connector


参数

电流(A) Current (A)		16		32		
极数 Pole (P)		2	3	2	3	
尺寸 Dimension (mm)	a	132	132	132	132	
	b	73.5	73.5	73.5	73.5	
	c	50	50	50	50	

KRIPAL



和谐系列

Hexie Series

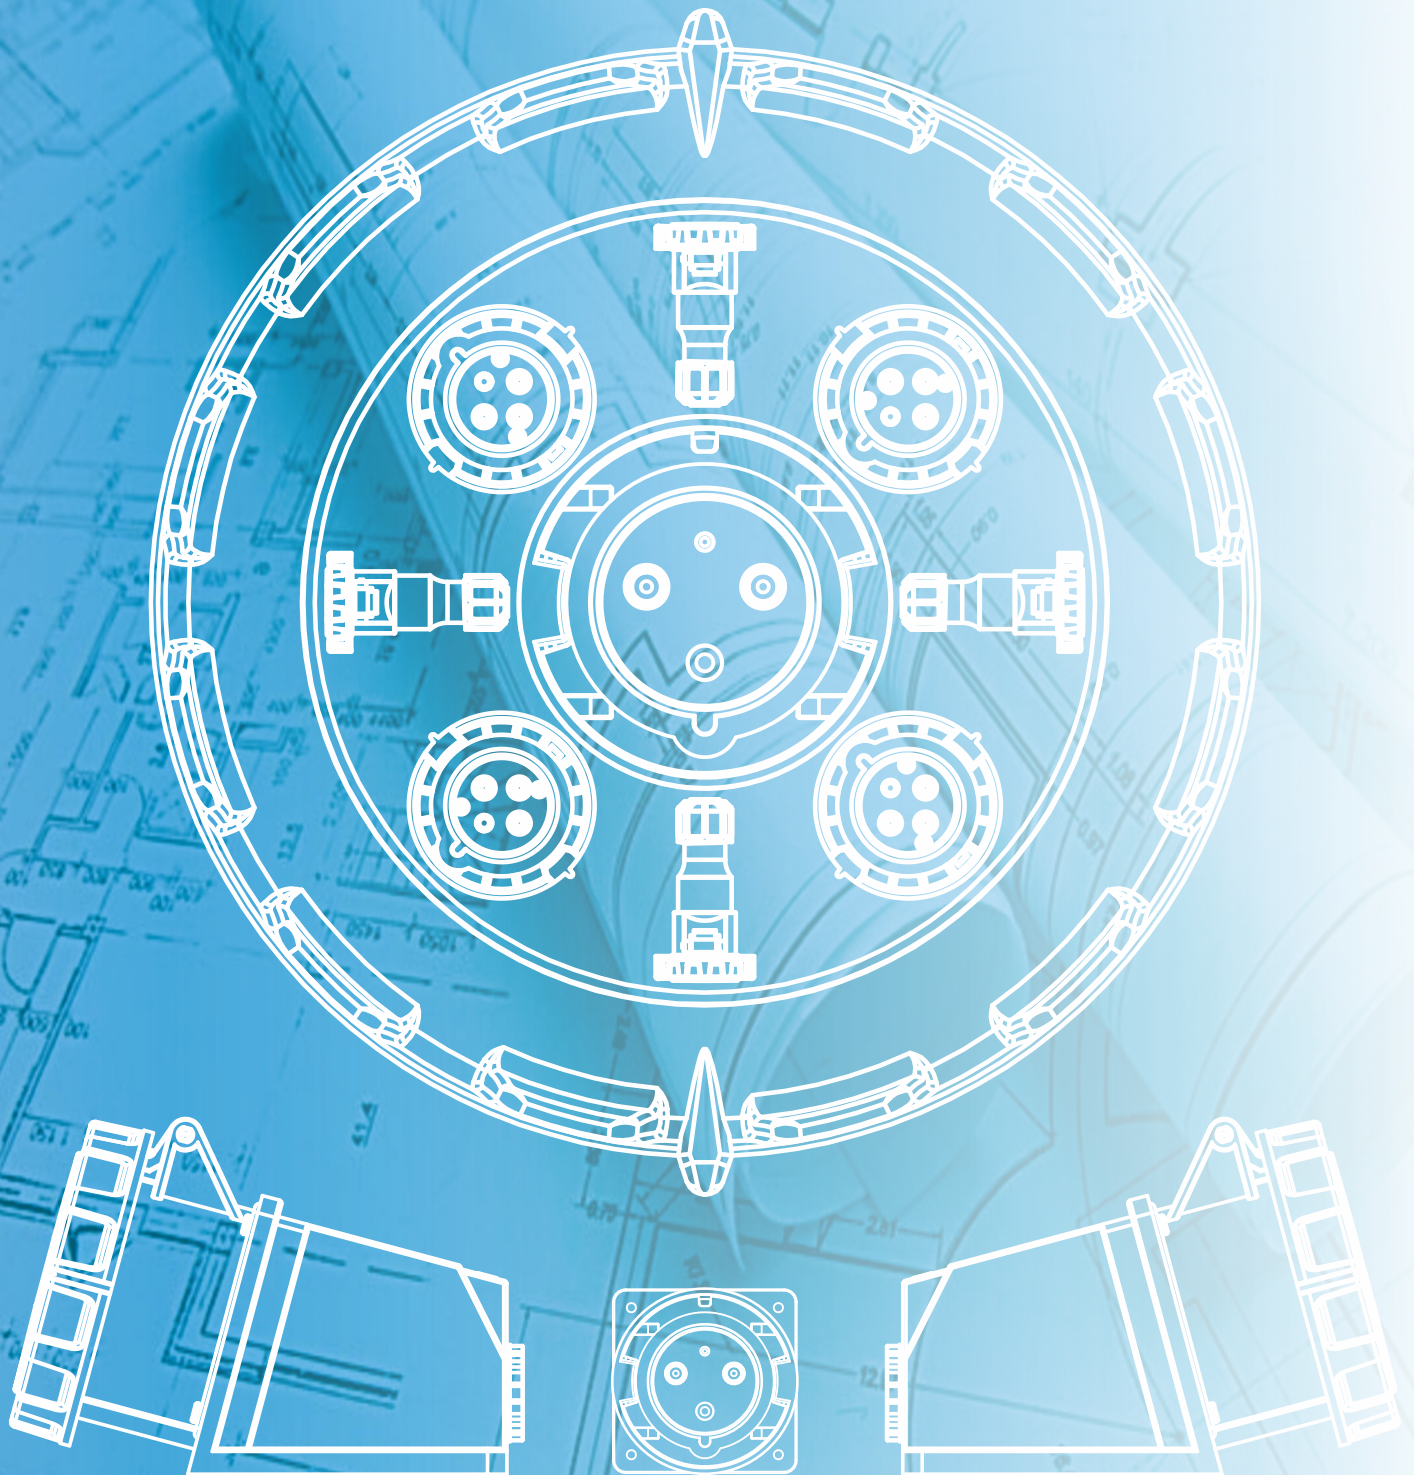

Hexie Series Connector

和谐系列连接器

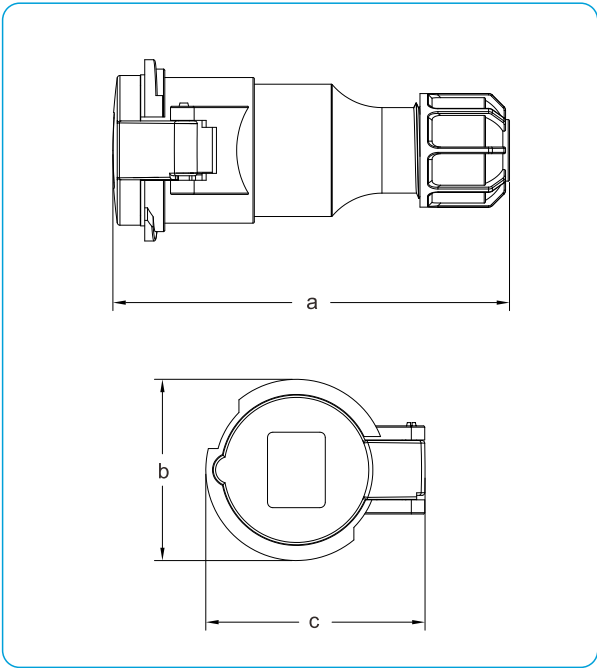

Description

选 型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 9h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
16	3	UKS3-C134-4	UKS3-C134-6	UKS3-C134-9	UKS3-C134-7		
16	4	UKS3-C144-4	UKS3-C144-9	UKS3-C144-6	UKS3-C144-7		
16	5	UKS3-C154-4	UKS3-C154-9	UKS3-C154-6	UKS3-C154-7		
32	3	UKS3-C234-4	UKS3-C234-6	UKS3-C234-9	UKS3-C234-7		
32	4	UKS3-C244-4	UKS3-C244-9	UKS3-C244-6	UKS3-C244-7		
32	5	UKS3-C254-4	UKS3-C254-9	UKS3-C254-6	UKS3-C254-7		

- ⚠ IP 44 CEE / IEC 连接器，带螺钉接线端子，一体外壳结构
⚠ IP 44 CEE / IEC Connector: screwed terminals, shell of integrated structure




Parameter

参 数

电流(A) Current (A)		16			32					
极数 Pole (P)		3	4	5	3	4	5			
尺寸 Dimension (mm)	a	142	150	155	173.5	173.5	178.5			
	b	60	68	76	82	82	89			
	c	75	82	89	95	95	101.5			
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		1.5 - 4	1.5 - 4	1.5 - 4	2.5 - 10	2.5 - 10	2.5 - 10			

Hexie Series Connector

和谐系列连接器

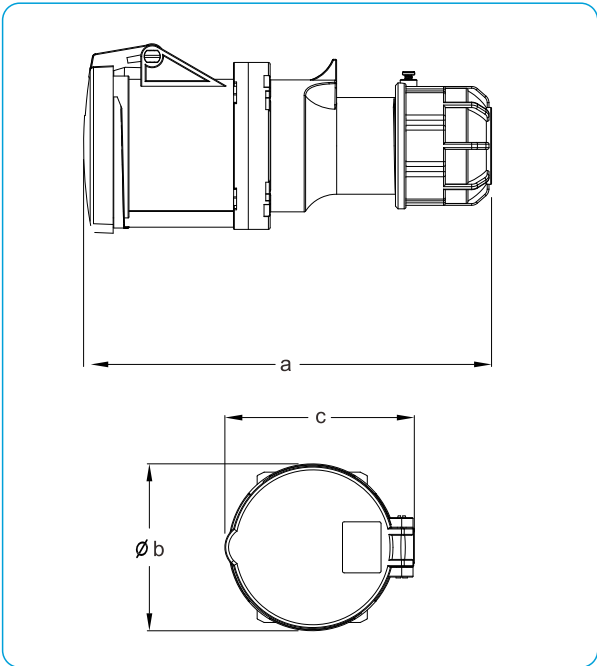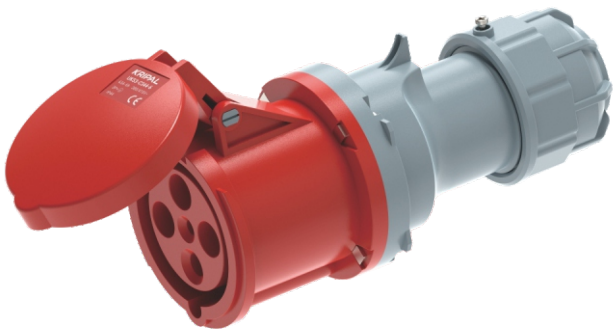

Description

选 型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 9h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
63	3	UKS3-C334-4	UKS3-C334-6	UKS3-C334-9	UKS3-C334-7		
63	4	UKS3-C344-4	UKS3-C344-9	UKS3-C344-6	UKS3-C344-7		
63	5	UKS3-C354-4	UKS3-C354-9	UKS3-C354-6	UKS3-C354-7		

- ⚠ IP 44 CEE / IEC 连接器，带螺钉接线端子，一体外壳结构
⚠ IP 44 CEE / IEC Connector: screwed terminals, shell of integrated structure

Parameter

参 数



电流(A) Current (A)		63		
极数 Pole (P)		3	4	5
尺寸 Dimension (mm)	a	234	234	234
	b	96	96	96
	c	109	109	109
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		1.5 - 4	1.5 - 4	1.5 - 4

其它电压的产品请来函询问 Other requirements, please contact us freely
German industrial standard: Grounded at 3h, DIN VDE 0623, European / Internationa standard: EN/IEC 60309-2
www.kripal.com ◆ 接地在3时位置，符合德国工业标准 DIN VDE 0623，欧洲/国际标准EN/IEC 60309-2

KRIPAL

Hexie Series Connector

和谐系列连接器

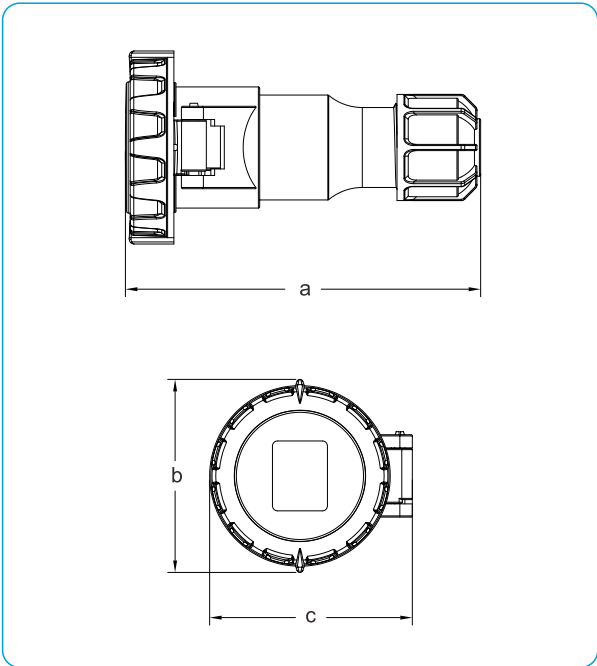

Description

选 型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 9h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
16	3	UKS3-C136-4	UKS3-C136-6	UKS3-C136-9	UKS3-C136-7		
16	4	UKS3-C146-4	UKS3-C146-9	UKS3-C146-6	UKS3-C146-7		
16	5	UKS3-C156-4	UKS3-C156-9	UKS3-C156-6	UKS3-C156-7		
32	3	UKS3-C236-4	UKS3-C236-6	UKS3-C236-9	UKS3-C236-7		
32	4	UKS3-C246-4	UKS3-C246-9	UKS3-C246-6	UKS3-C246-7		
32	5	UKS3-C256-4	UKS3-C256-9	UKS3-C256-6	UKS3-C256-7		

- ▲ IP 67 CEE / IEC 连接器，软接触工艺，带外部电缆紧固装置及耐高温接触载体
▲ IP 67 CEE / IEC Connector: soft-touch process, external cable grip, highly heat resistant contact carrier




Parameter

参 数

电流(A) Current (A)		16			32		
极数 Pole (P)		3	4	5	3	4	5
尺寸 Dimension (mm)	a	143	150	156	174	174	179
	b	78	83	92	98	98	105
	c	81.5	87	94.5	101	101	107
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		1.5 - 4	1.5 - 4	1.5 - 4	2.5 - 10	2.5 - 10	2.5 - 10

Hexie Series Wall Mounted Socket

和谐系列连接器

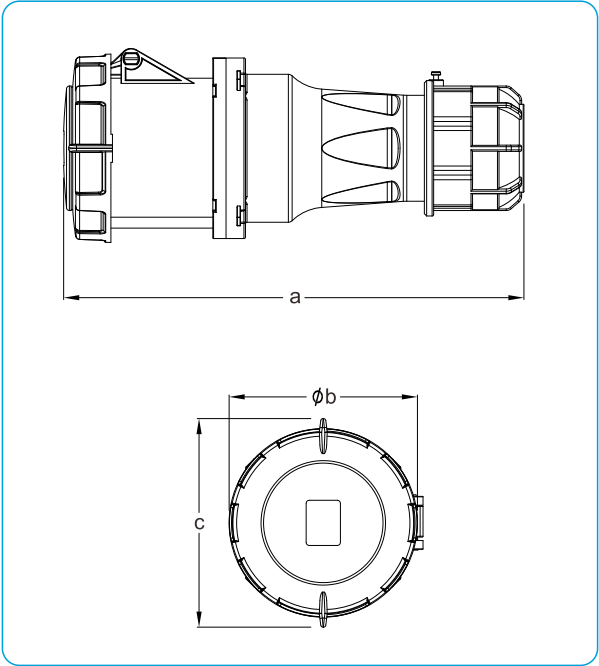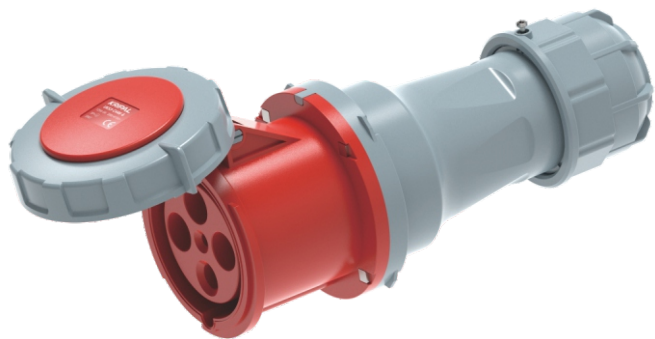

Description

选 型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 9h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
63	3	UKS3-C336-4	UKS3-C336-6	UKS3-C336-9	UKS3-C336-7		
63	4	UKS3-C346-4	UKS3-C346-9	UKS3-C346-6	UKS3-C346-7		
63	5	UKS3-C356-4	UKS3-C356-9	UKS3-C356-6	UKS3-C356-7		
125	3	UKS3-C436-4	UKS3-C436-6	UKS3-C436-9	UKS3-C436-7		
125	4	UKS3-C446-4	UKS3-C446-9	UKS3-C446-6	UKS3-C446-7		
125	5	UKS3-C456-4	UKS3-C456-9	UKS3-C456-6	UKS3-C456-7		

- ▲ IP 67 CEE / IEC 连接器，软接触工艺，带外部电缆紧固装置及耐高温接触载体
▲ IP 67 CEE / IEC Connector: soft-touch process, external cable grip, highly heat resistant contact carrier


Parameter

参 数

电流(A) Current (A)		63			125		
极数 Pole (P)		3	4	5	3	4	5
尺寸 Dimension (mm)	a	237	237	237	295	295	295
	b	110	110	110	121	121	121
	c	118	118	118	134	134	134
导线横截面积从最小至最大 Conductor cross section (mm ²) Min.-max.		6	6	6	25	25	25
		- 25	- 25	- 25	- 70	- 70	- 70

Multiple-outlet Socket

多功能工业插头插座

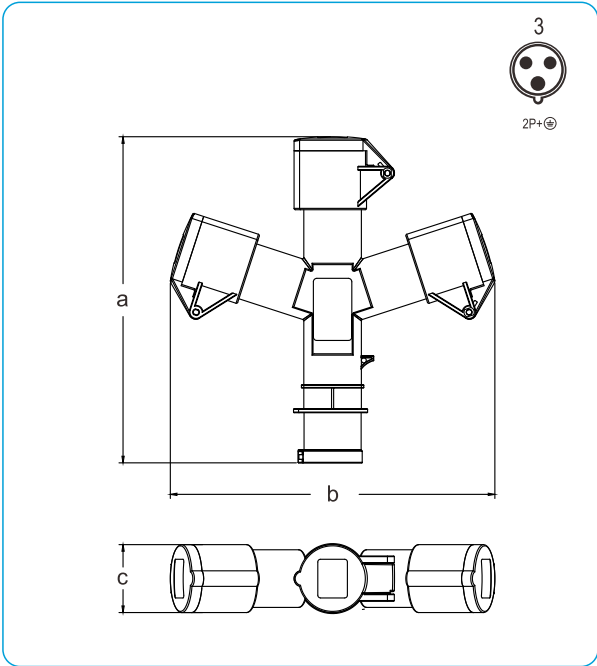

Description
选型

电流(A) Current(A)	极数 Pole	110 V 50 a. 60 Hz 3P 4P 5P 4h 4h 4h	230 V 50 a. 60 Hz 3P 4P 5P 6h 3h 9h	400 V 50 a. 60 Hz 3P 4P 5P 9h 6h 6h	500 V 50 a. 60 Hz 3P 4P 5P 7h 7h 7h	>50-500V 100-300Hz 3P 4P 5P 10h 10h 10h	>50-500V a.300-500Hz 3P 4P 2h 2h
16	3		UKS-30134				

- ⚠ IP 44 CEE / IEC 插座、开关、带机械联锁
⚠ IP 44 CEE / IEC Switched socket with mechanical interlock

Parameter
参数

电流(A) Current (A)	16
极数 Pole (P)	3
尺寸 Dimension (mm)	a 234 b 237 c 50
最大电缆直径 Max cable diameter (mm)	25
导线横截面积从最小至最大 Conductor cross section (mm²) Min.-max.	2.5 - 10