


Terminal Junction Boxes(IP54/IP65)

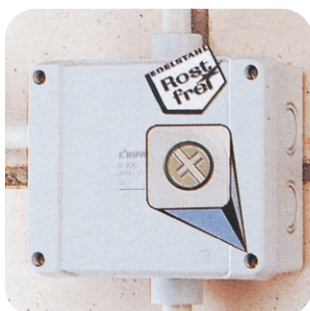
接线盒 (IP54/IP65)



高级耐冲击塑料(热塑料)使外表时尚美观
Expensive impact resistance of plastic (thermal plastic) forms a fashionable and attractive appearance



关于终端，先进的终端技术和灵活的支撑位置(5位)
Advanced terminal technology and flexible support position for terminal (five-position)




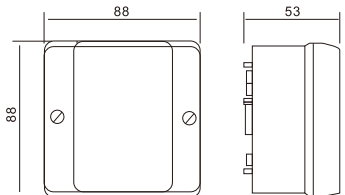

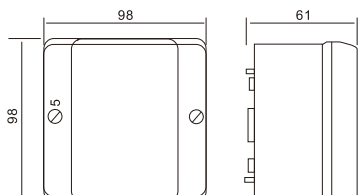

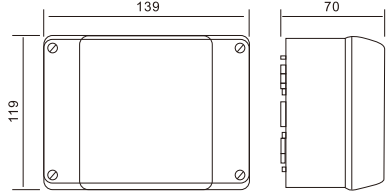

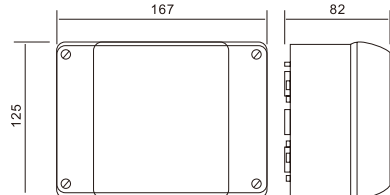

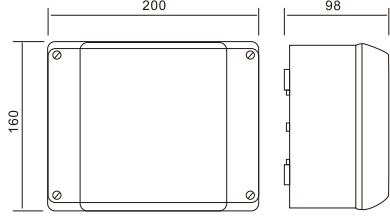
抗腐蚀性V2A公制螺钉拥有大螺距，使得螺钉的紧固工作只相当于正常的三分之二
Corrosion resistance of metric screw of V2A with large screw pitch to make the handling for screw fastening two third thenormal one



如果条件需要，压紧接头必须达到IP65
Compression glands must be used to achieve IP65 rating when conditions requires

Terminal Junction Boxes(IP54/IP65)

接线盒 (IP54/IP65)

图片 Picture	型号 Type	管式连接(插入式) Pipe connection (inserted type)	导线接入孔(公制) Conductor input hole (metric system)	平面绘图 Dimensional Drawings
2.5mm ² ,20A,AC400V 3~ 4mm ² ,25A,AC250V 1~				
D 9020Z	4 ESM20适用导线 Φ6-13mm Four ESM 20 applicable conductor Φ6-13mm			
D 9025Z	型号(带终端) Model No (With Terminal)			
4mm ² ,25A,AC400V 3~ 6mm ² ,32A,AC250V 1~				
D 9040Z	4 ESM25适用导线 Φ9-17mm Four ESM 25 applicable conductor Φ9-17mm			
D 9045Z	型号(带终端) Model No (With Terminal)			
6mm ² ,32A,AC400V 3~ 10mm ² ,50A,AC250V 1~				
K 9060Z	3 ESM32适用导线 Φ9-23mm Three ESM 32 applicable conductor Φ9-23mm			
K 9065Z	型号(带终端) Model No (With Terminal)			
10mm ² ,50A,AC400V 3~ 16mm ² ,65A,AC250V 1~				
K 9100Z	3 ESM32适用导线 Φ9-23mm Three ESM 32 applicable conductor Φ9-23mm			
K 9105Z	型号(带终端) Model No (With Terminal)			
25mm ² ,85A,AC400V 3~ 35mm ² ,100A,AC250V 1~				
K 9250Z	3 ESM40适用导线 Φ17-30mm Three ESM 40 applicable conductor Φ17-30mm			
K 9255Z	型号(带终端) Model No (With Terminal)			