

UKX Isolating Switch

UKX 隔离开关



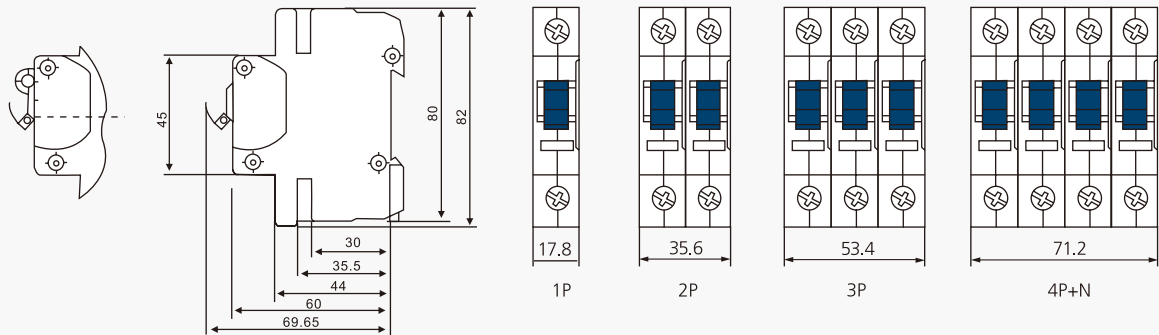
Technology Specification

技术参数

额定电压(Ue) Rated voltage	240V/415V
频率 Frequency	50/60Hz
短路耐受能力 Short circuit durability	接100A后备熔断器可达25kA After 100A current, the spare fuse reaches 25kA
通断能力 Making & Breaking capacity	1.2In.:1.1Ue
使用类别 Style of use	AC22
连接导线截面 Coupling wire section	Max.50mm ²
防护等级 Case protection grade	IP40(安装条件) IP40 (After installation)
隔离 Isolation	明确的开关位置状态按照DIN VDE0106 According to specific switch location state

Outline and Installaiton Dimensions

外形与安装尺寸



Main Feature

主要特点

双功能接线端子

Double-functioned terminals

具有触头状态指示器

With contactor condition indicator



可以挂锁，锁孔直径可达6mm外

Lock attachable, with its hole diameter of 6mm or more

UKX Isolating Switch

UKX 隔离开关

		1P	2P
适用于工业，商业和民用的 电气线路中作主开关使用 IEC947.3(EN60947.3) Used as main switch in the industrial, business or civil electric circuits Struchure features IEC947.3(EN60947.3)			
	额定电流 Rated current In(A)		
	40 63 80 100	UKX-40/1 UKX-63/1 UKX-80/1 UKX-100/1	UKX-40/2 UKX-63/2 UKX-80/2 UKX-100/2

		3P	4P
适用于工业，商业和民用的 电气线路中作主开关使用 IEC947.3(EN60947.3) Used as main switch in the industrial, business or civil electric circuits Struchure features IEC947.3(EN60947.3)			
	额定电流 Rated current In(A)		
	40 63 80 100	UKX-40/3 UKX-63/3 UKX-80/3 UKX-100/3	UKX-40/4 UKX-63/4 UKX-80/4 UKX-100/4